

BC822A-HSE

2 MP IP box camera / Caméra box IP 2 MP

Quick Start Guide / Guide rapide



Find additional manuals, the datasheet, the EU Declaration of Conformity and the latest firmware for this product at:

<http://www.tkhsecurity.com/support-files>

Plus d'information sur le site ci-dessus.



SECURITY SOLUTIONS


Unpack / Déballer



*Lens not included /
*Lentille non inclus




Mount lens / Monter la lentille

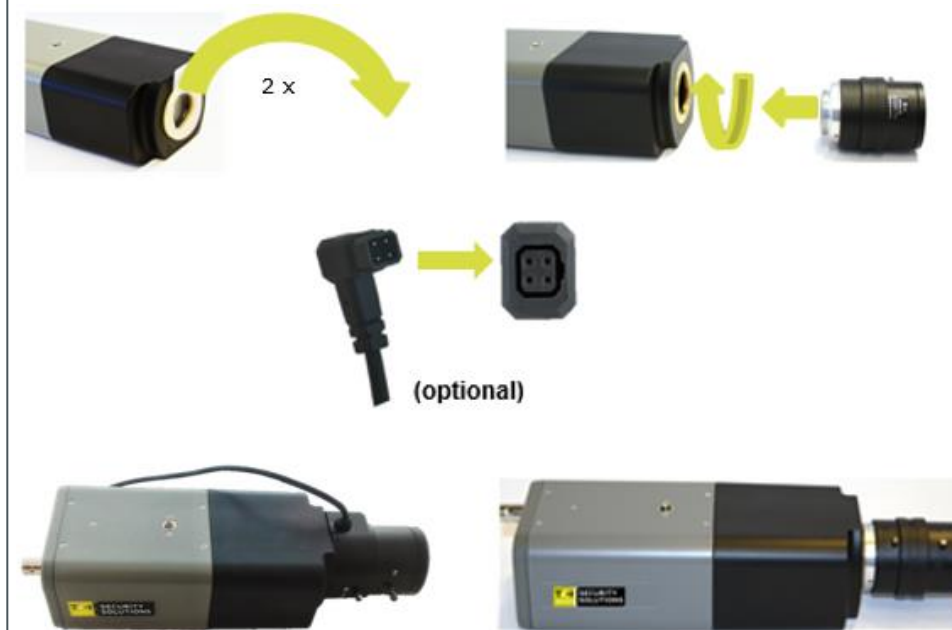

Point camera / Pointer la caméra



Connect / Connecter

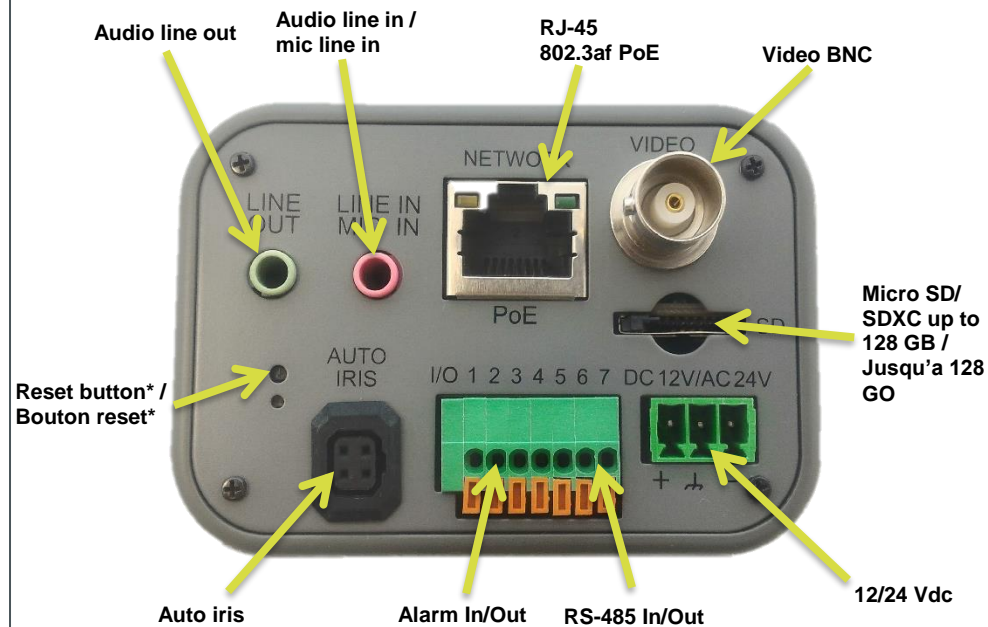

*Reset button:


Press and hold for 10 sec. when powering on or rebooting.

Warning: Restores factory default settings, including IP address, user name and password!

***Bouton reset:** Appuyer et maintenir 10 sec lors de l'allumage ou du reboot.

Attention: La remise à zéro usine supprime l'adresse IP et les mots de passe!

Fixed IP address / Une adresse fixe

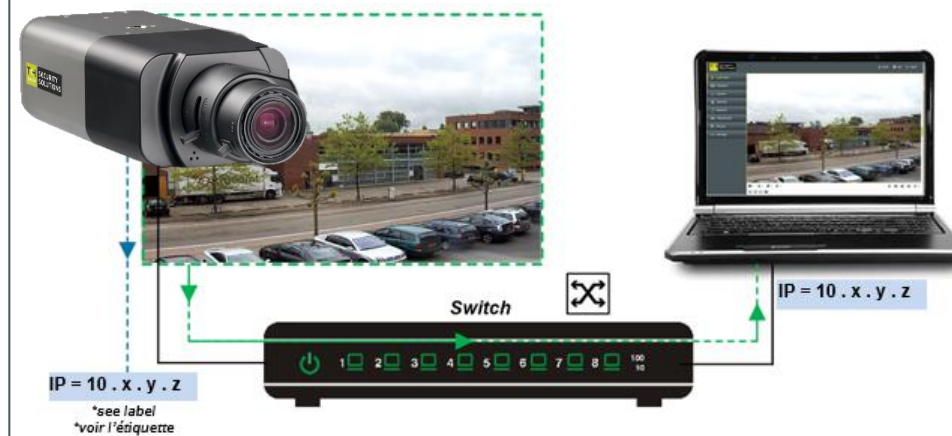

Use Device Manager (see next) to discover the camera on the network.
Utiliser le "Device Manager (voir ci-après), pour retrouver la caméra sur le réseau.

Install Device Manager / Installer Device Manager

1 <http://www.tkhsecurity.com/support-files>

2

3

support-files > Software > Siquira Device Manager

Change IP address / Changer l'adresse IP

Siquira Device Manager

Network Interface: VideoLAN: 192.168.1.5

Device	IP Address	Netmask	Name	MAC Address
BC822A-HSE	192.168.1.64	255.255.255.0		BC1403

1

2

3

Change Network Settings 192.168.1.64 BC1103

Current IP address: 192.168.1.64
Current Netmask: 255.255.255.0
Current Gateway: 0.0.0.0

Static IP

New IP address: 172.22.250.137
New Netmask: 255.255.0.0
New Gateway: 0.0.0.0

Enable DHCP

OK Cancel

Open web interface / Ouvrir l'interface web

Siquira Device Manager

Network Interface: VideoLAN: 172.22.250.21

Device	IP Address	Netmask	Name
BC820H1	172.22.253.158	255.255.0.0	Siquira-820-series
BC820H1	172.22.253.164	255.255.0.0	Siquira-820-series-253-164
BC820H1	172.22.253.159	255.255.0.0	Siquira-820-series-253-159
BC820H1	172.22.253.156	255.255.0.0	Siquira-820-series-253-156
BC820H1-SFP	172.22.253.169	255.255.0.0	Siquira-820-series-253-169
BC840-PID	172.22.233.46	255.255.0.0	599485971998-430630
EVE ONE	172.22.1.51	255.255.0.0	EVE ONE-418128
FD820M1IR	172.22.253.20	255.255.0.0	Siquira-820-series-253-20
FD820M1IR	172.22.253.104	255.255.0.0	Siquira-820-series-253-104
HSDB20H2-E	172.22.253.26	255.255.0.0	Siquira-820-series
S-60 E	172.22.237.174	255.255.0.0	599485975988-245258
BC822A-HSE	172.22.250.137	255.255.0.0	
TC620-PID	172.22.250.39	255.255.0.0	
TrafiBotHD	172.22.93.29	255.255.0.0	

1

2

Open Web Page Ctrl+W

Change Credentials in Device... Ctrl+C

Credentials used for Device... Ctrl+U

Change Name... Ctrl+N

Change Network Settings... Ctrl+H

Change Time Settings... Ctrl+T

Identify... Ctrl+I

Backup Settings... Ctrl+B

Restore Settings... Ctrl+R

Upgrade Firmware... Ctrl+F

Capabilities...

Remove device from list Del

Log in / Se connecter

Windows Security

ieexplore.exe

The server 172.19.99.31 is asking for your user name and password. The server reports that it is from MegapixelIPCamera.

Warning: Your user name and password will be sent using basic authentication on a connection that isn't secure.

Admin

Password

Remember my credentials

OK Cancel

The default user name and password are:
Admin
1234

i For more information about user accounts and passwords, see User Manual.
Pour plus d'informations sur les comptes et mots de passe, voir le manuel d'utilisation.

! Set a strong password now!
Créer un mot de passe fort maintenant!

qwerty1234 ❌

x6W@oM0a!9#F ✅

View live video / Voir la vidéo en direct

TKH SECURITY SOLUTIONS BC822A-HSE

Zoom trigger AF 28/12/2010 05:28

Video Format: only H.264

Zoom: x1 x12

Focus: Near Far Push AF

AF Mode: Manual Zoom AF

MJPEG bitrate: middle compression, middle quality
H.264-1 bitrate: 4096 kbps, middle compression, middle quality
H.264-2 bitrate: 1024 kbps, high compression, low quality
H.264-3 bitrate: 1024 kbps, high compression, low quality
H.264-4 bitrate: 1024 kbps, high compression, low quality

Internet Explorer

Adjust video / Régler les paramètres vidéo

TKH SECURITY SOLUTIONS BC822A-HSE

Streaming

Video Format: H.264 Only

Video Compression: H.264 format: 1920 x 1080 (60 fps)

Video ROI: Portrait support: N/A

Video OCX Protocol: Save

Video Frame Rate

Video Mask

Audio

Text Overlay Settings:

Include date: Include time:

Include text string:

Text color: black Text background color: transparent

Save

Video Portrait Allow: No

Save

Video Rotate Type: 180 degree rotate

Save

GOV Settings:

H.264-1 GOV Length: 60 H.264-2 GOV Length: 30

H.264-3 GOV Length: 30 H.264-4 GOV Length: 30

Save

H.264 Profile: