

# GCA-B4322D

1/3" CCD Fixed Dome Camera 2.8~12 mm SOFT D/N 650L



- Varifocal Lens:  $f = 2.8 - 12$  mm, auto iris
- New and easy Zoom/Focus adjustment mechanic
- 3 Axis Gimbal, to mount on Wall or Ceiling
- Built-in Service Monitor Port & OSD Control Port
- Video Enhancement: ATR, BLC, HLC, DNR
- Support Dual Power AC24V/DC12V

## SUMMARY

---

Grundig Analogue DSP Cameras  
High quality, reliable and effective.

Grundig analogue cameras have been designed and built to the very highest standards. Grundig has selected components which deliver outstanding image quality, including the very best image sensors and digital signal processors (DSPs). The cameras have been designed for up-to-date surveillance applications, incorporating functionality such as extended dynamic range, digital noise reduction, high light compression and more.


All the cameras in the Grundig analogue range have unique features in different housings to suit all eventualities. Outdoor options include Bullet cameras with infrared LED and vandal-resistant domes and indoor options include a large range of dome cameras

## SPECIFICATIONS

Image Sensor	1/3" CCD Sony 960H Ex-view HAD II
Scanning System	PAL, 50Hz, 625L (V), 2:1 Inter Line Transfer
Pixels - Effective	976(H) x 582(V)
Resolution	650 (H) lines
Col/B&W	Auto (fixed IR-Cut filter)
Sensitivity B&W	0.8 Lux @ F1.4
Sensitivity Colour	0.8 Lux @ F1.4
High Speed Shutter	1/50 ~ 1/10.000 sec, auto
S/N Ratio	>52dB (AGC off)
Lens Focal Length	2.8 ~ 12 mm
Viewing Angle	97° ~ 24°
Lens Drive Type	Auto iris (DC)
Iris F-Number	F= 1.4 ~ 360
Motion Detection	On/Off (4 Zones)
Number of Privacy Zones	4 ea
BLC	BLC / HLC / off
ATR (Adaptive Tone Reproduction)	On/Off
AGC	Off, On (x0.25/x0.5/x0.75/x1)
Digital Noise Reduction (DNR)	Off, On 2D
OSD	Yes (DE,EN,ES,FR,RU,PT,JP)
Camera ID	52 character, 2 lines
White Balance	ATW/Push/User1/User2/AntiCR/Manual/Push Lock
Video Outputs	1 CVBS 1 Vpp (BNC) & 1 test monitor out
Humidity	less than 90%, non condensing
Operating Temperature	-25°C ~ +55°C
Supply Voltage	12 VDC / 24 VAC
Accessories included	Multi-Language Manual, Template, Cable for Service Monitor, Screws, Anchors, screw driver for Zoom and Focus adjustment
Power Consumption	1.7 W
Weight	0.32 kg
Dimensions w*h*d	Ø 130 x 99.9 mm

## DIMENSIONS

---

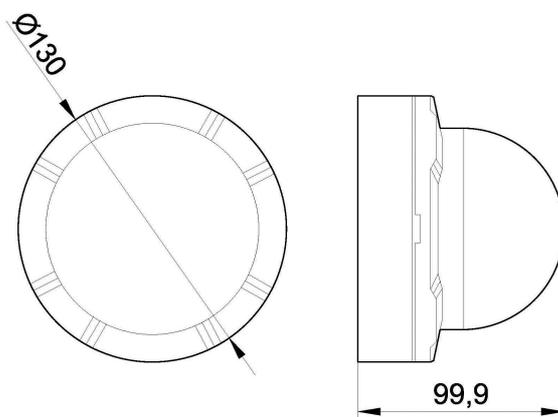

## ACCESSORIES

---



GBR-WA05  
Wall bracket for GCx-xxxxxD series