

GCA-B4327D

1/3" CCD Fixed Dome Camera 2.8~10.5mm ICR 28 IR LED 700L
WDR



- WDR function, Colour/B&W function with removable IR cut filter
- Smart IR LED Control with adjustable level
- TAMRON Varifocal Lens: f = 2.8 - 10.5 mm, auto iris
- New and easy Zoom/Focus adjustment mechanic
- 3 Axis Gimbal, to mount on Wall or Ceiling
- Remote Control Interfaces over Coax (Coaxitron)
- Built-in Service Monitor Port & OSD Control Port
- Video Enhancement: BLC, HLC, DNR, DIS
- 15 polygonal Privacy Zone Masking
- Support Dual Power AC24V/DC12V

SUMMARY

Grundig Analogue DSP Cameras

High quality, reliable and effective.


Grundig analogue cameras have been designed and built to the very highest standards. Grundig has selected components which deliver outstanding image quality, including the very best image sensors, lenses and digital signal processors (DSPs). The cameras have been designed for up-to-date surveillance applications, incorporating functionality such as extended dynamic range (optional), motion adaptive digital noise reduction, intelligent video analytics and more.

All the cameras in the Grundig analogue range have unique features in different housings to suit all eventualities. Outdoor options include Bullet cameras with infrared LED and vandal-resistant domes and indoor options include a large range of dome cameras

SPECIFICATIONS

| | |
|-----------------------------------|---|
| Image Sensor | 1/3" CCD Sony 960H Super HAD II, Dual Shutter |
| Scanning System | PAL, 50Hz, 2:1 Interlace, double scan |
| Pixels - Effective | 976(H) x 582(V) |
| Resolution | 650 (H) lines colour, 700 (H) lines b&w |
| Col/B&W | Auto, Color, Removable IR-Cut Filter (ICR) |
| Sensitivity Colour | 0.4 Lux(50IRE) @ F1.2 (SensUp=0, AGC Off), 0.000007Lux 15IRE @ F1.2(SensUpx512) |
| Sensitivity B&W | 0 Lux LED IR on |
| High Speed Shutter | 1/50 ~ 1/10.000 sec, auto |
| S/N Ratio | >52 dB |
| Lens Focal Length | 2.8 ~ 10.5 mm (TAMRON) |
| Viewing Angle | 102° ~ 27° |
| Lens Drive Type | Auto iris (DC) |
| Iris F-Number | F= 1.2 ~ 360 |
| Sens Up | Off ~ x512, auto |
| Motion Detection | On/ Off/ Sensitivity/ 4 Area setting |
| Number of Privacy Zones | 15 (polygonal method) |
| AGC | Off/ On (Very LOW/ LOW/ Mid /High /Very High/ User/ Fix) |
| WDR | Off/Low/Middle/High |
| BLC | On/Off/HLC |
| Digital Noise Reduction (DNR) | Low/Midlow/Mid/Midhigh/High/Off (2D/3D) |
| Digital Image Stabilization (DIS) | Off/On |
| Digital Zoom | Off/1 ~ 16x |
| Reverse | Off/ H-REV/ V-REV/ HV-REV |
| OSD | Yes (DE,EN,ES,FR,RU,PT,JP) |
| Camera ID | 52 character, 2 lines |
| White Balance | ATW/Push/User1/User2/AntiCR/Manual/Push Lock |
| IR LED | 28 pcs. |
| Optical Wavelength | 850 nm |
| Max. IR Distance | 25 m |
| Remote Control | Coaxitron, data on coax cable |
| Video Outputs | 1 CVBS 1 Vpp (BNC) & 1 test monitor out |
| Accessories included | Multi-Language Manual, Template, Cable for Service Monitor, Screws, Anchors, screw driver for Zoom and Focus adjustment |
| Humidity | less than 90%, non condensing |
| Operating Temperature | -25°C ~ +55°C |
| Supply Voltage | 12 VDC / 24 VAC |
| Power Consumption | 4.1 W |
| Weight | 0.5 kg |
| Dimensions w*h*d | Ø 130 x 99.9 mm |

DIMENSIONS

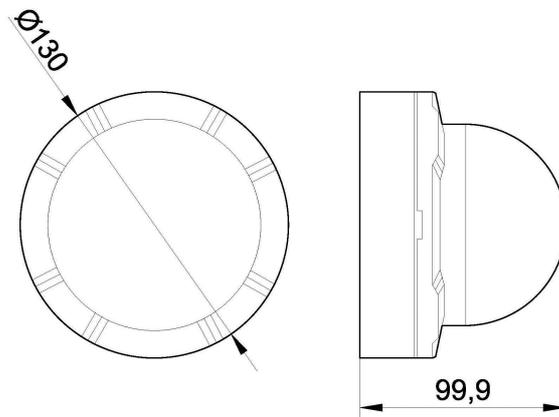

ACCESSORIES



GBR-WA05
Wall bracket for GCx-xxxxxD series