

# GCT-K2326V

2 Megapixel Full HD-TVI VF-Fixed Dome Camera 2.8~12mm ICR IR LED WDR



- 2 Megapixel Sony® Exmor™ Sensor with superior low light performance
- Dual video output: HD-TVI and analogue composite
- Smart IR Control with adjustable level
- Motion Detection Function
- Privacy Zone Masking Function
- 3 Axis Gimbal, to mount on Wall or Ceiling
- Vandal- and weather-proof
- Support Dual Power AC24V/DC12V

## SUMMARY

---

Grundig introduces professional line of high definition TVI cameras.

The HD-TVI system provides high definition video images over standard coaxial cable. Full HD resolution images over distances of up to 500m with RG59 coaxial cable is possible.

Grundig professional TVI cameras got also an analog output for full integration into analogue systems.

Get the advantages of IP technology without their drawbacks. Get 16:9 megapixel pictures without network configuration, bandwidth problems and network security risks. Use existing coax cables and only exchange the cameras and recorders. Get a “real” live picture and see the things that happen in the now, not a few seconds ago.


TVI products are easy to handle, easy to install and produce amazing high quality pictures.

## SPECIFICATIONS

Image Sensor	1/2.8" CMOS Progressive Scan Sony Exmor™
Pixels - Effective	1920(H) x 1080(V)
Col/B&W	Auto (ICR) / Color / B/W / External
Sensitivity Colour	0.9 lux@50IRE (AGC max, Sensup OFF)
Sensitivity B&W	0 Lux LED IR on
Video Outputs	1 CH HD-TVI (BNC), 1 ch Composite 1.0Vp-p 75Ω (BNC)
High Speed Shutter	1/25 ~ 1/30.000 sec, auto, Flicker
S/N Ratio	>50dB (AGC off)
Lens Focal Length	2.8 ~ 12 mm
Viewing Angle	120.9°(H) ~ 37.1°(H) / 61.4°(V) ~ 20.7°(V)
Lens Drive Type	Auto iris (DC)
Iris F-Number	F= 1.6 ~ 360
Sens Up	Off ~ x32, auto
AGC	0~20 adjustable, 20=default
WDR	Off/Low/Middle/High
BLC Back Light	On/ Off/ Area/ Level
De-Fog	Off/On
White Balance	ATW, AWB, AWC, Manual
Digital Noise Reduction (DNR)	On/Off
Digital Zoom	Off ~ 8x
Motion Detection	On/ Off/ Sensitivity/ 4 Area setting
Number of Privacy Zones	16 programmable zones
Reverse	Off/ H-REV/ V-REV
IR LED	28 pcs.
OSD	English
Optical Wavelength	850 nm
Max. IR Distance	15/30 m (according to scene reflexion)
Smart IR	Off / On (1~20)
Coaxial control	Pelco-C (Coaxitron®)
Protection Rating	IP66 / IK10
Humidity	less than 90%, non condensing
Operating Temperature	-25°C ~ +55°C
Supply Voltage	12 Vdc / 24 Vac
Power Consumption	6 (LED on) W
Weight	1 kg
Dimensions w*h*d	Ø 150 x 124 mm

## DIMENSIONS

---

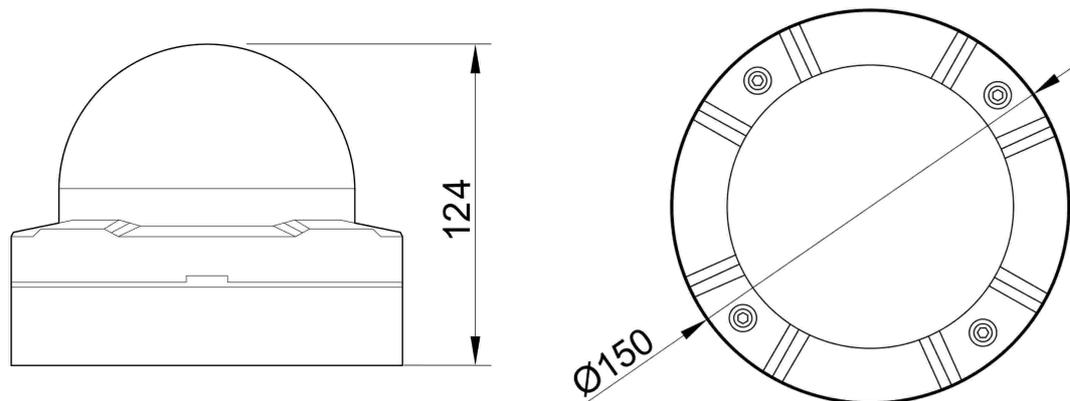

## ACCESSORIES

---



GBR-WA04  
Wall bracket



GBR-WB02  
Wedge Base



GBR-CE02  
Pendant Mount Bracket



GBR-IC04  
Ceiling Flush Mount Adapter

---