

FDI103MI-I

3 MP Intelligent IP indoor fixed dome camera with IR

Quick Start Guide



Find additional manuals, the datasheet, the EU Declaration of Conformity and the latest firmware for this product at:
<http://www.tkhsecurity.com/support-files>




SECURITY SOLUTIONS

Unpack




Note: Subject to modification. Actual product and accessories may differ in appearance.

Connect

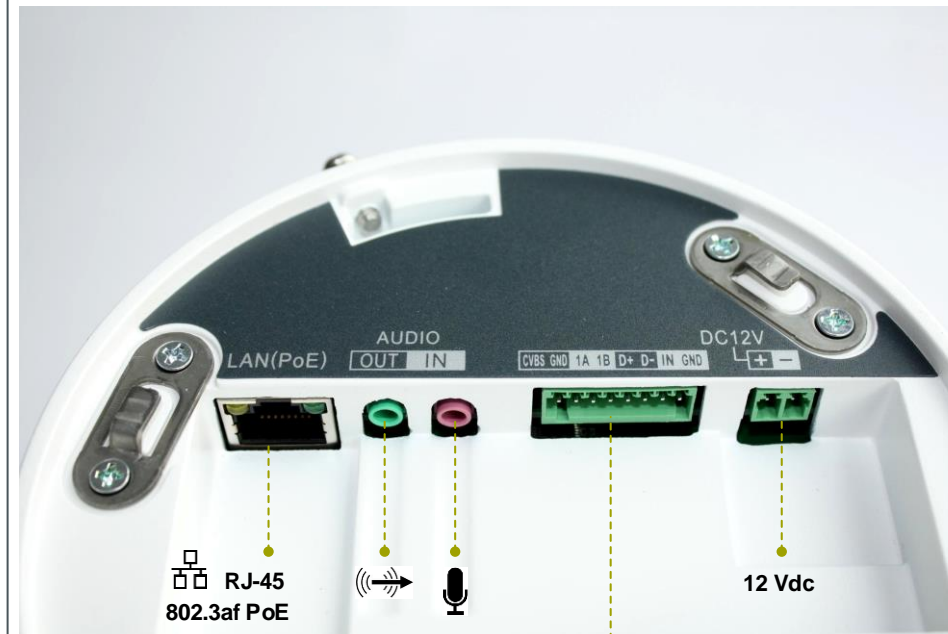

- CVBS, GND : Auxiliary video output
- 1A, 1B : Alarm Out
- D+, D- : RS-485 interface
- IN, GND : Alarm In

Insert Micro SD card / Reset

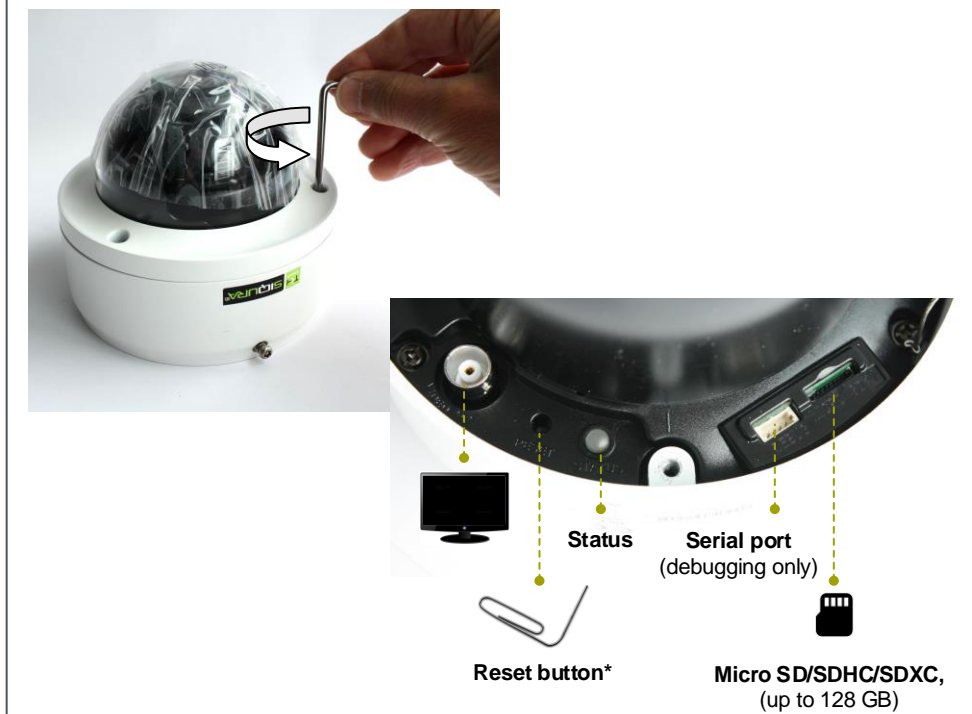

***Reset button:** Press and hold for 10 sec. when powering on or rebooting.
Warning: Restores factory default settings, including IP address, user name and password!


Point the lens




Note: For mounting instructions for pole, wall or ceiling mount, see respective manuals.



Use DHCP server

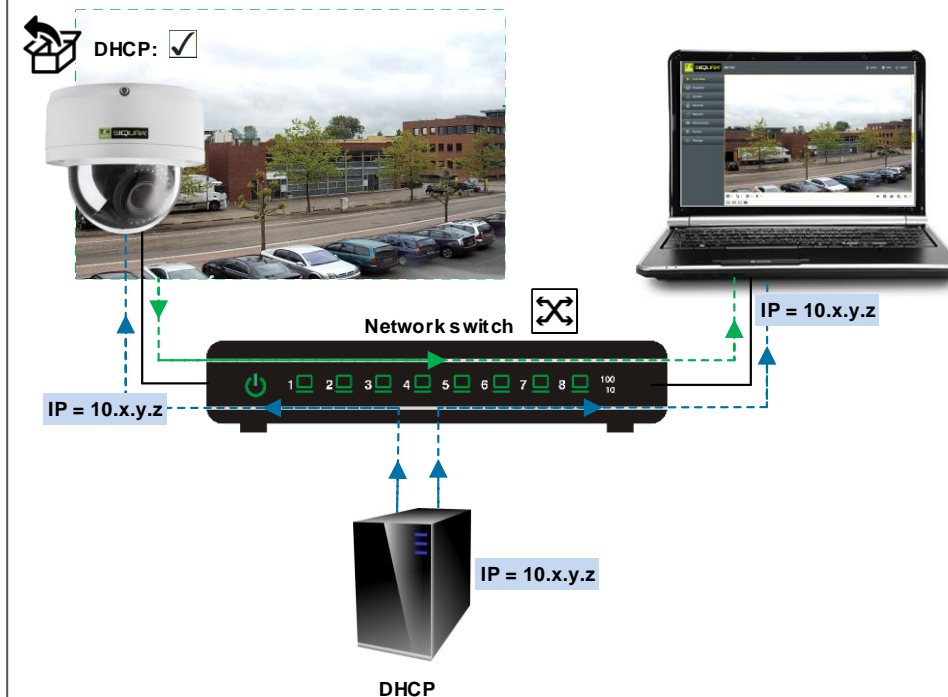

Use fixed IP address

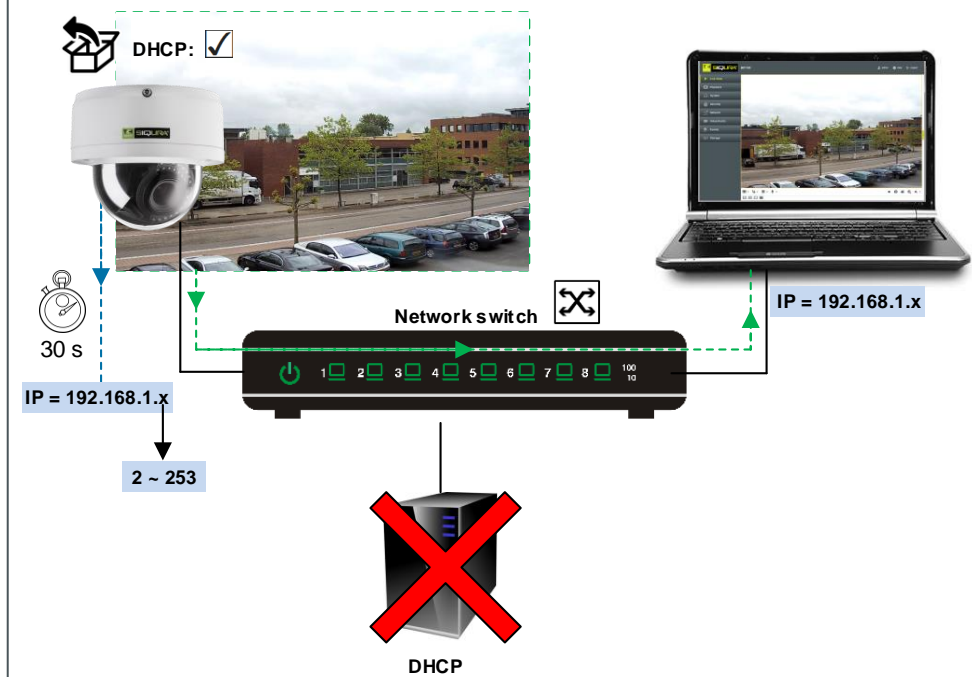

Note: Use Device Manager (see next) to discover the camera on the network.

Install Device Manager (optional)



1



support-files > Software > Siqura Device Manager




2


3

Important: 1103 series cameras require Device Manager version 1.8.1 or later. Replace an existing, older installation of this tool on your PC, if necessary.

Change IP address via Device Manager

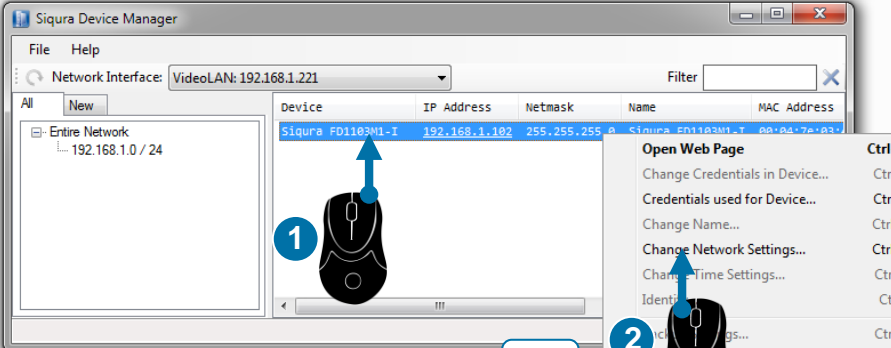


1

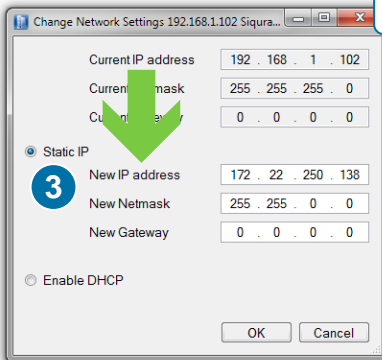

2

3


Open web interface via Device Manager

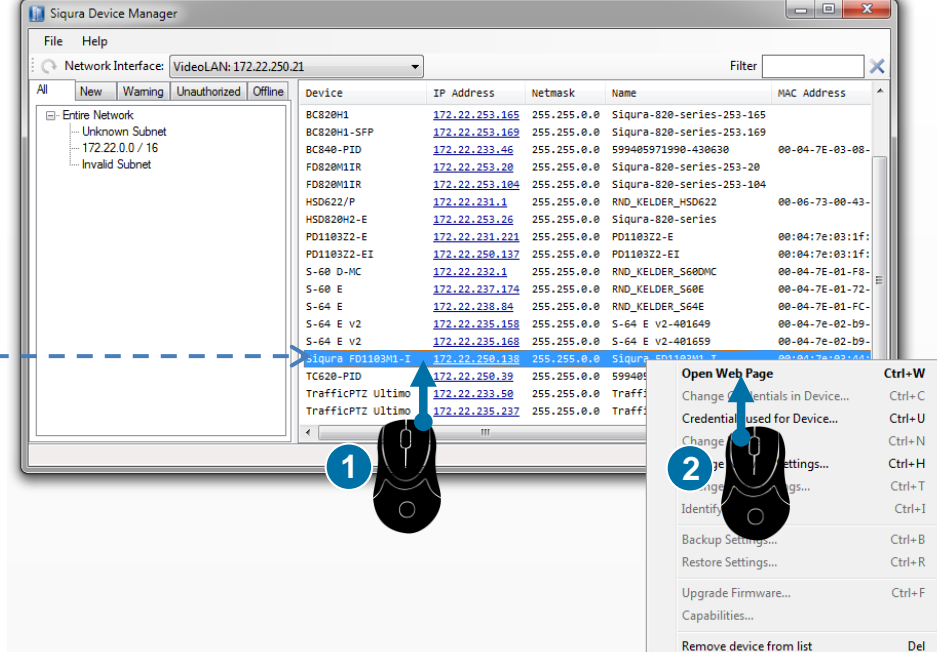


1

2

Set password



Administrator / End User

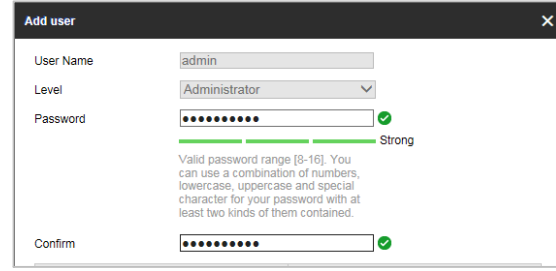


Set a strong password!

qwerty1234 ❌

x6W@oM0a!9#F ✅


Note: For information about user accounts and passwords, see User Manual.

View live video

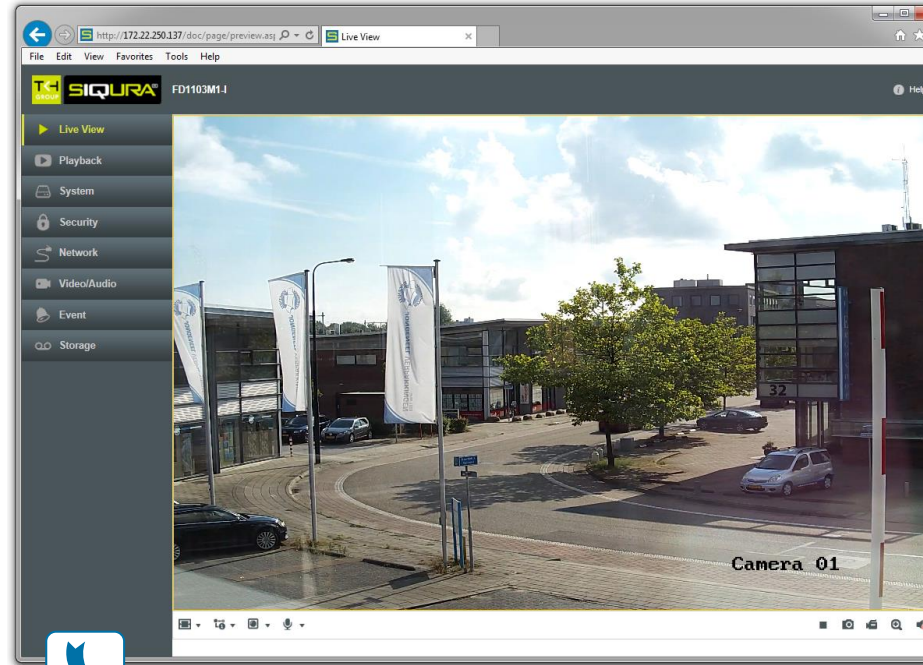

Internet Explorer

Adjust zoom/focus

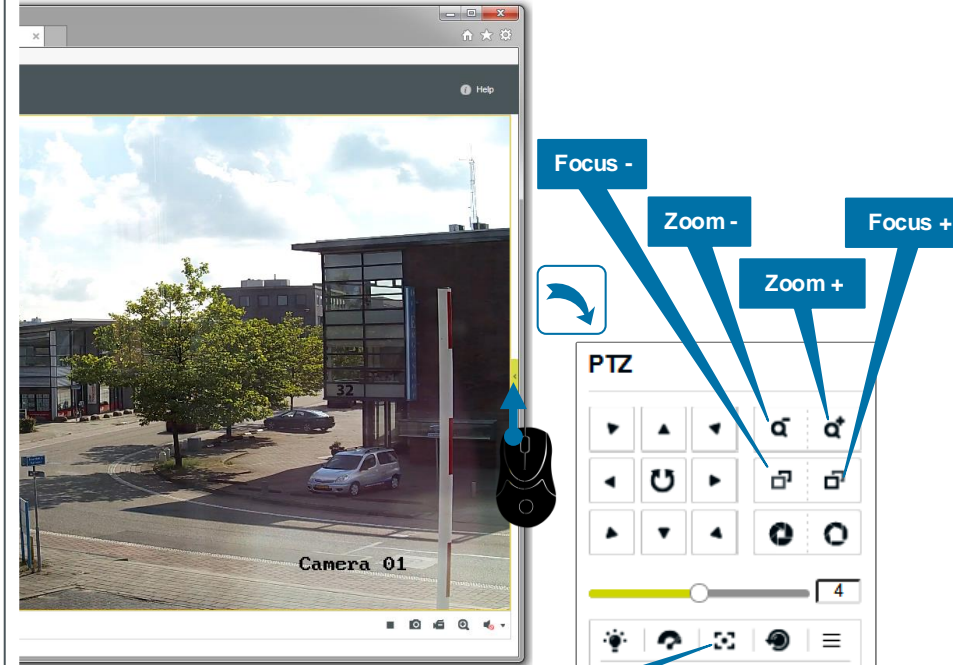

Focus -

Zoom -

Focus +

Zoom +

Auxiliary focus (push to focus)