


PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS

I5PT-390IPX10
I5PT-390IPX4



Main Features:

- ONVIF
- PoE Support
- Dual Video Stream
- H.264 Video Compression
- 50m IR Distance
- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- 250° Pan Rotation
- 65° Continuous Tilt
- 256 Preset Position
- 4 Pattern, Scan Route and 4 Cruise Lanes
- Park Action
- Fully function web-client
- 3D-DNR Noise Reduction
- Digital WDR
- IP66 Water-proof and Dust-proof
- Excellent High Resolution Picture Quality
- True Day/Night with ICR Filter
- Enhanced Noise Reduction
- WB/BLC/AGC

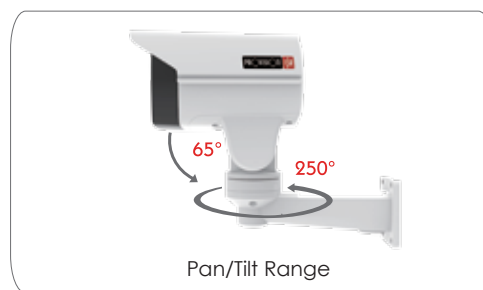

Specifications

		Model	I5PT-390IPX10-P	I5PT-390IPX4-P	
Camera	Video	Image Sensor	1/2.9" CMOS		
		Effective Pixels	1920×1080		
		Sync System	Progressive Scan		
		Electronic Shutter	1/25s ~ 1/10000s		
		Day & Night	ICR (Auto/Day/Night)		
		Min. Illumination	0.05 Lux (Color), 0.01 Lux (B&W), 0 Lux (IR On)		
	Lens	S/N Ratio	>52dB		
		Optical Zoom	x10 (5.1-51mm)	x4 (2.8-12mm)	
		Digital Zoom	No		
		Focus	Auto / Manual		
Audio	Minimum Focus Distance	1.5m			
	Horizontal Angle of View	H: 50.4°(Wide) to 5.4°(Tele)		81.2°(Wide) to 22.6°(Tele)	
Image Enhancement	Audio compression	No			
	Communication	No			
	Image Settings	AWB Adjustable			
		Exposure Mode			
	Sharpness, Saturation, Brightness & Contrast Adjustable				
	Auto Gain Adjustable				
	BLC	Yes			
	Sense-Up	Yes (5 Levels)			
	WDR Range	Digital WDR			
	Noise Reduction	3D-DNR			
Image Orientation	Mirror/Flip				
Privacy Zone	Yes				
	Motion Detection	Yes			
Compression	Video Compression	H.264 Main Profile MJPEG/JPEG Baseline			
	Resolution	Main Stream: 1080P, 720P Sub-Stream: D1, CIF			
	Multi-stream	1920x1280 (1~30fps) 1280x720 (1~30fps) D1 (1~30fps) / CIF (1~30fps)			
	Bit rate	64Kbps ~ 8Mbps			
	Encode Mode	VBR/CBR			
	Image Quality	Six levels under VBR; Free adjustment under CBR			

Network	Remote Monitoring	IE Browsing, CMS 3.x Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTP, RTSP, UPnP, SNMP, PPPoE, DNS, DDNS, SMTP, FTP, HTTP, IPv4, IPv6
Pan/Tilt	ONVIF	Yes
	Ethernet	100Mbps
	PoE	Yes
Housing	Pan/Tilt Range	250° Pan / 65° Tilt
	Pan/Tilt Speed	Max Preset Speed: 12°/s Manual: 0.5°~12°/Sec (Proportional to Zoom)
	Presets	255
	Patterns	4
	Cruise	4 Groups (Non-Configurable)
Connectivity	Scan	Yes
	Schedule	No
	IR Distance	50m
	Water-proof	IP66
	Wiper	No
Others	Fan & Heater	No
	Bracket	Wall Bracket
	Dimensions	225*175*94mm
	Weight(gross)	920gr
	Network	RJ45 (+PoE)
Connectivity	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	No
	SD Card	No
	RS485	No
Others	Alarm	No
	Power Supply	12VDC/2A (Not supplied)
Work Environment	-20 C ~50 C , 10%~90% Humidity	

Cable Connectors Sketch

