

Powerful Gold Line
Standalone NVR

Model :
NT4251 / NT4252




Model :
NX6251 / NX6252

Flexible, Seamless Live & Playback on multiple channel • Internal DHCP Server
Support Local Alarm and Audio • PTZ Control Through Onvif

SPECIFICATIES

MODEL	NT4251	NT4252	NX6251	NX6252
Operating System	Embedded Linux			
Signal Format	Max. 4M IP			
Video Input Connector	10 / 100 / 1000 Mbps Ethernet (RJ-45)			
Channel	8CH	16CH	8CH	16CH
Video Output (Spot)	Composite: 1 (Selectable)			
VGA (Spot)	1 (Max. 1920 x 1080) (Selectable)			
HD Out	1 (Max. 3840 x 2160)			
Throughput	80Mbps	160Mbps	80Mbps	160Mbps
Audio I/O	3 / 1		4 / 1	
Alarm I/O	2 / 1 (Relay)		4 / 4 (TTL) & 2 (Relay)	
Master Alarm	-		Supported	
USB	2 x USB (1 x Front Panel, 1 x Rear Panel)		3 x USB (2 x Front Panel, 1 x Rear Panel)	
Network	10 / 100 / 1000 Mbps Ethernet (RJ-45)			
User Interface (GUI / Control Device)	Joystick, Mouse, PTZ Control			
Archive File Format	EXE (Video Clip) / AVI (Video Clip) / JPEG (Still Image)			
NTP	Supported			
GMT Time Zone	Supported			
Auto DST	Supported			
Recording Modes	Continuous / Alarm / Motion / Emergency			
Motion Detection	Supported (30 x 20)			
Playback Control	x1, x2, x4, x8, x16, x32, x64			
PTZ Control	RS-485 / 422 Serial Port (Terminal Block), Onvif			
Text Insertion	4			
Multi Language	English / Korean / Japanese / Czech / Dutch / Finnish / French / German / Italian / Polish / Portuguese / Russian / Spanish / Thai / Turkish / Vietnamese			
Central Monitoring Station	CMS Pro (Windows) / iCMS (Mac) / Web Client Pro			
Mobile Viewer	iOS / Android			
Primary Storage	2 x SATA HDD		4 x SATA HDD	
eSATA	-		Supported	
Clip Copy Storage	USB Memory Stick			
Dimension (WxDxH)	290 mm x 274 mm x 65 mm / 11.41 inch x 10.78 inch x 2.55 inch		430 mm x 380 mm x 88 mm / 16.93 inch x 14.96 inch x 3.46 inch	
Working Environment	Temperature : 5°C~40°C / 41°F~104°F, Humidity : 0% ~ 90%			
Power Adapter	12V, 3A (36W)		12V, 6A (72W)	

SPECIFICATIES

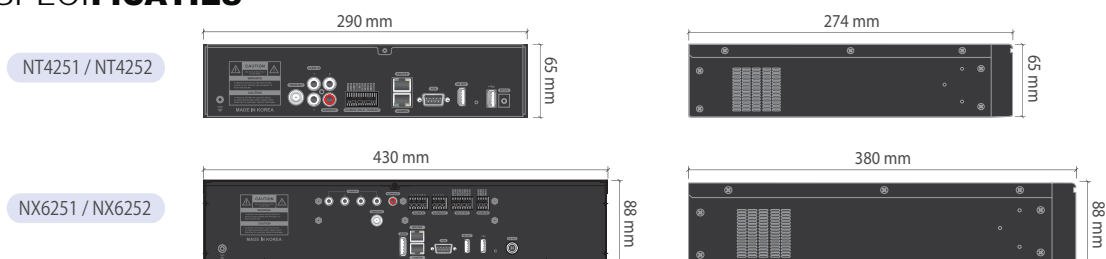

SYSTEEM AANSLUITINGEN

