

PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS


I5PT-340IPX10

IP SOLUTION
4MP



Main Features:

- ONVIF
- Dual Video Stream
- H.264 Video Compression
- 50m IR Distance
- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- 250° Pan Rotation
- 65° Continuous Tilt
- 255 Preset Position
- 4 Pattern, Scan Route and 4 Cruise Lanes
- Park Action
- Fully function web-client
- 3D-DNR Noise Reduction
- Digital WDR
- IP66 Water-proof and Dust-proof
- Excellent High Resolution Picture Quality
- True Day/Night with ICR Filter
- Enhanced Noise Reduction
- WB/BLC/AGC

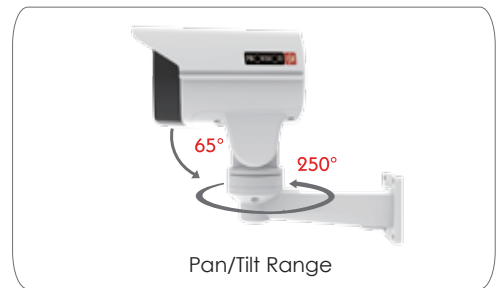

Specifications

		Model	I5PT-340IPX10
Camera	Video	Image Sensor	1/3" CMOS
		Effective Pixels	2560×1440
		Sync System	Progressive Scan
		Electronic Shutter	1/25s ~ 1/30000s
		Day & Night	ICR (Auto/Day/Night)
		Min. Illumination	0.05 Lux (Color), 0.01 Lux (B&W), 0 Lux (IR On)
	Lens	S/N Ratio	>52dB
		Optical Zoom	x10 (4.7-47mm)
		Digital Zoom	Yes (x2-x16)
	Audio	Focus	Auto / Manual
Minimum Focus Distance		1.5m	
Image Enhancement	Horizontal Angle of View	H: 54.1°(Wide) to 5.8°(Tele)	
	Audio compression	No	
	Communication	No	
	Image Settings	AWB Adjustable Exposure Mode Sharpness, Saturation, Brightness & Contrast Adjustable Auto Gain Adjustable	
	BLC	Yes	
	Sense-Up	Yes (5 Levels)	
	WDR Range	Digital WDR	
	Noise Reduction	3D-DNR	
	Image Orientation	Mirror/Flip	
	Privacy Zone	Yes	
Compression	Motion Detection	Yes	
	Video Compression	H.264 Main Profile	
	Resolution	Main Stream: 4MP, 3MP, 2MP (1080P) Sub-Stream: D1, CIF	
	Multi-stream	4MP (1~30fps) 3MP (1~30fps) 3MP (1~30fps) D1 (1~30fps) / CIF (1~30fps)	
	Bit rate	64Kbps ~ 8Mbps	
	Encode Mode	VBR/CBR	
	Image Quality	Six levels under VBR; Free adjustment under CBR	

Network	Remote Monitoring	IE Browsing, CMS 3.x Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTP, RTSP, UPnP, PPPoE, DNS, DDNS, SMTP, FTP, HTTP, IPv4, IPv6
Pan/Tilt	ONVIF	Yes
	Ethernet	100Mbps
	PoE	No
Housing	Pan/Tilt Range	250° Pan / 65° Tilt
	Pan/Tilt Speed	Max Preset Speed: 12°/s Manual: 0.5°~12°/Sec (Proportional to Zoom)
	Presets	255
	Patterns	4
	Cruise	4 Groups (Non-Configurable)
Connectivity	Scan	Yes
	Schedule	No
	IR Distance	50m
	Water-proof	IP66
	Wiper	No
Others	Fan & Heater	No
	Bracket	Wall Bracket
	Dimensions	225*175*94mm
	Weight(gross)	920gr
	Network	RJ45
Power	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	No
	SD Card	No
	RS485	No
Alarm	Alarm	No
	Power Supply	12VDC/2A (Not supplied)
Work Environment	-20 C ~50 C, 10%~90% Humidity	

Cable Connectors Sketch

