



2MP 10x optische zoom HD-SDI speed dome camera

HD-SDI



VCD-P5012HD




VCD-P5012HD-F

Eigenschappen

- 1/3" 2MP Panasonic CMOS sensor
- HD-SDI, CVBS
- x10 Optical Zoom(5.1mm ~51mm) & x32 Digital Zoom
- Day & Night(ICR)
- Real-time True WDR
- Digital Noise Reduction(2D+3D)
- Digital Image Stabilization
- Privacy Mask Function
- High Light Compensation
- Defog Function
- 360° Endless Pan Rotation, 0°~180° Tilt angle(Digital Flip)
- 255 Presets, 8 Tours, 8 Scans, 4 Patterns
- Supports Multiple Protocols

Afmetingen

Unit : mm

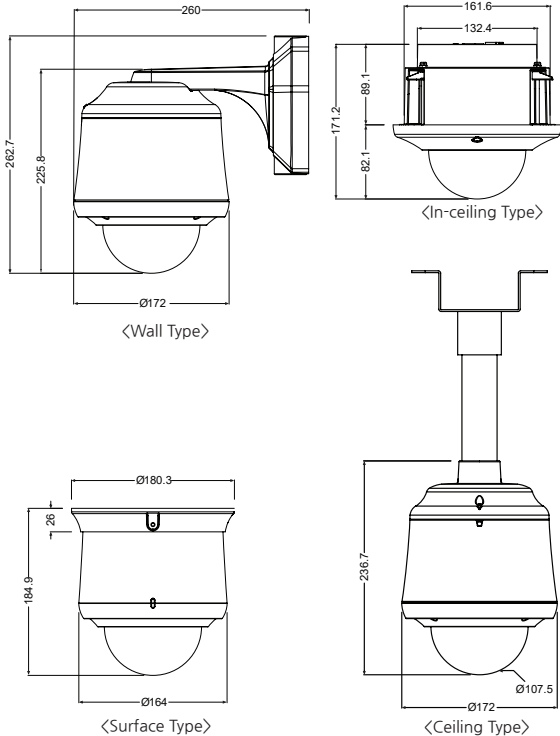

MODEL		VCD-P5012HD		
CAMERA				
Image Sensor	1/3" Panasonic CMOS Sensor			
Total Pixels	1956 (H) x 1266 (V) = 2.48M Pixels			
Active Pixels	1944 (H) x 1092 (V) = 2.12M Pixels			
Video Format	1080p@30/25fps, 720p@60/50fps, 720p@30/25fps			
Min. Illumination	Color	0.5 lux / DSS 0.125 lux		
	BW	0.1lux / DSS 0.025 lux		
S/N Ratio	more than 50dB (AGC off)			
Video Output	HD-SDI, CVBS			
LENS		x10		
Lens Type	x10 Day & Night Zoom Lens			
Zoom Ratio	Optical x10, Digital x32 Zoom			
Focal Length	f = 5.1mm ~ 51mm			
Aperture Ratio	F1.6 (wide) ~ F1.8 (tele)			
Angle Of View (D, H, V)	WIDE	68°	54°	31°
	TELE	6.7°	4.9°	4.0°
PAN / TILT				
Pan	360° Endless Pan, 0.1° to 200°/sec.			
Pan Speed	Max 300°/sec, ± 0.1° Accuracy			
Tilt	0° to 90° tilt angle, 0.1° to 120°/sec.			
Tilt Speed	Max 250°/sec, ± 0.1° Accuracy			
Preset	255 points, less than 0.1° accuracy			
CAMERA FUNCTIES				
Camera Title	ID / Title / Zoom Ratio / System Message			
Day & Night	Auto / Day / Night / Ext-in			
WDR/BLC	Off / WDR / BLC / HLC			
ACE	Off / Low / Middle / High			
DNR	Auto / Off / Low / Middle / High			
Defog	Off / On(Auto / Manual)			
Image Stabilization	Off / On			
Privacy Mask	Off / On (24 positions)			
Digital Slow Shutter	Off /x2 /x4			
Gain Control	Off / On			
White Balance	Auto / One Push / Manual / Indoor / Outdoor			
Shutter Speed	1/30(25) ~ 1/30,000 sec			
E.Zoom	Off / x2 ~ x32			
Digital Flip	Off / H / V / H&V			
Digital I/O	2 alarm / 2 relay out			
Remote Control Interface	RS-422, 485			
Protocol	Pelco-D / Pelco- P			
ALGEMEEN				
Power Source	12Vdc			
Power Consumption	INDOOR : Operating(1.5A) / OUTDOOR: Operating(4A),Max(Heater 30W / Fan on)			
Operating Temperature	-40°C ~ +60°C / 0% ~ 90% RH			
Ingress Protection	IP66 (Outdoor Model only)			
Weight	1.04Kg(Indoor), 2.2Kg(Outdoor)			