

SC-MA8VDA

AHD/TVI/CVI/ CVBS
Multi-format Video Distributor

SC-MA8VDA are video signal distributor supporting various input & output signal (AHD, TVI, CVI, CVBS).

Those support UTC function for camera PTZ control and OSD setting at remote place through coaxial cable. So, separate control line is not necessary.



Eigenschappen

- 8 IN/24 OUT video signal distributor
- Various signal input & output (AHD, TVI, CVI, CVBS)
- UTC function for HD Analog signal
- Video signal output with same resolution of Input signal
- Video signal output without signal loss
- Surge protection circuit built-in

[SC-MA8VDA]

[Voorkant]




[Achterzijde]



SC-MA8VDA UTC functie (DVR poort):

Signaal	Resolutie
AHD	1280x720p 25/30Hz, 1920x1080p 25/30Hz
TVI	1280x720p 25/30Hz, 1920x1080p 25/30Hz
CVI	1280x720p 25/30Hz, 1920x1080p 25/30Hz

Verbindingen:

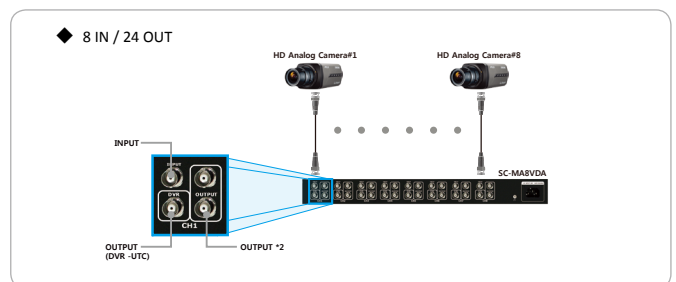

Specificaties:

MODEL	SC-MA8VDA	
Video Input	AHD, CVI, TVI, CVBS(Select one)	
Video Output	4 of same video format with Input signal	
Power Input	AC 220V	
UTC	HD Analog DVR Port / 1280x720p 25/30Hz, 1920x1080p 25/30Hz	
Connection port	Video In	BNC-F, 8 IN
	Video Out	BNC-F, 24 OUT
	Power In	AC INLET
LED	RED	Power In
	GREEN	Video In
Power consumption	MAX. 28W	
Temperature / Humidity	-10°C ~ +50°C / 0 ~ 80%	
Case / Weight	Steel / 3.2kg	
Dimensions (mm)	430(W) x 350(H) x 44(D)	

Afmetingen:

