

NVR12-32800RFAN(2U)


32CH 12MP Face Recognition NVR with alarms, RAID support, and NDAA compliance

Provision-ISR NVR12-32800RFAN(2U) is a high-performance network video recorder supporting Face Recognition and Advanced Video Analytics (DDA). The device, suitable for big-sized installations (up to 32 channels), features 16 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project. All hardware components, including RAID, are validated to meet the demands for reliable high-definition surveillance. This model complies with NDAA demands and ensures that your devices are cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime.

32
CH

CHECK POINT
EMBEDDED

12
MP

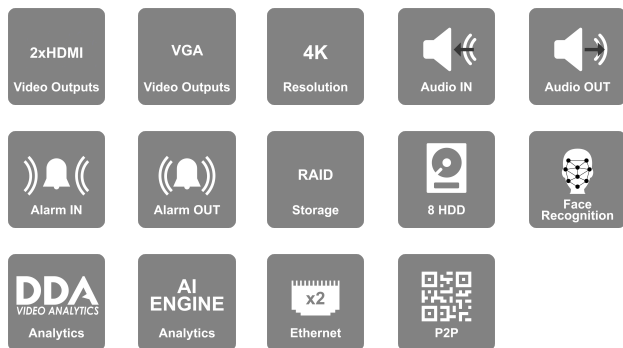

MAIN FEATURES

- NVR12-32800RFAN(2U) Video Input:
 - 32 Channels Video Output:
 - 2 x HDMI (4K+FHD)
 - VGA Recording:
 - 32CH 12MP Real-Time
 - FPS: 800 (PAL) / 960 (NTSC) Playback:
 - Local: 16Ch Simultaneously
 - Remote: 16Ch Simultaneously
 - Audio:
 - Input: 1CH + IPC Inputs
 - Output: 1CH + IPC Output
 - 2 Way Audio Alarm:
 - Input: 16+IPC
 - Output: 4+IPC
 - Storage:
 - 8 x SATA (Up to 10TB each)
 - 2 x E-SATA (Up to 10TB each)
 - RAID: (0/1/5/6/10) Support
 - Network:
 - 2 x RJ-45: 10/100/1000Mbps PTZ/Keyboard:
 - Network PTZ Support
 - 1 x RS-485 Keyboard Support
 - Power Supply:
 - AC100/240V
 - Analytics: AI by IPC:
 - All Analytics Supported by the camera AI By NVR:
 - Up to 2Ch DDA1 (Sterile Area/Line Crossing) or
 - Up to 2Ch Face Detection + Recognition or
 - Up to 6Ch Face Recognition Based on FW Version: v1.4.10
- Features subject to firmware version changes

SPECIFICATIONS

3rd Party Cyber Protection	
General	Quantum IoT Nano agent by Check Point™
Protection Methods	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	32Ch over Network
Output	HDMI1 (4K 30/60Hz, 1080P, 1280x1024), HDMI2 + VGA (1280x1024, 1080P)
View Mode	Independent*, Up to 32ch on monitor1 + 9ch on monitor2
Fish-Eye Dewarp	Local + Web
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch - 12MP ; 4Ch - 4MP ; 9-32Ch - D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC Outputs
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Face Recognition, LPR, Thermal. Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.
Analytics Channels (IPC Based)	32Ch (requires supporting IPC)
Analytic Channels (NVR Based)	Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (or their combinations)
Face Recognition Rate	18 Faces per second (6Ch supported)
Bandwidth	
Incoming	320Mbps

Outgoing	256Mbps
Record/ Main Stream	
Real-Time Recording	32CH 12MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS, and all of its combinations
16MP	N/A
12MP	960FPS(NTSC)/800FPS(PAL)
8MP	960FPS(NTSC)/800FPS(PAL)
5MP and lower	960FPS(NTSC)/800FPS(PAL)
Master stream over network	Up to 32CH@Recording Resolution
Substream	
Resolution substream	Depends on IPC
Remote view	
Max Channel View	160Ch (Limited to Outgoing Bandwidth Capacity)
Remote Applications	
User Access	128 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback)
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	16Ch
Remote	16Ch

Search Mode	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
--------------------	---

Backup

USB	2 USB 2.0 Port + 1 USB 3.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)

Alarm

Alarm-in	16+IPC
Alarm-out	4+IPC

Storage

HDD	8
E-Sata Support	2
RAID	Yes (0/1/5/6/10)

PTZ

Connection	via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	Yes (C06 Keyboard Connection)

Network

Ethernet	2x1000/100/10Mbps self-adaptive Ethernet interface with Fault Tolerance / Dual Network Configuration
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)


PoE

PoE Ports	N/A
Speed	N/A
Standard	N/A

NVR12-32800RFAN(2U)

CCTV Mode	N/A
Total Power	N/A
Max. Power Output (Per Ch.)	N/A
Others	
Power Supply	AC100/240V
Power consumption (No HDD)	30W
Dimension	W445xD436xH90mm
Operation Temperature	0°C~50°C

DIMENSIONS

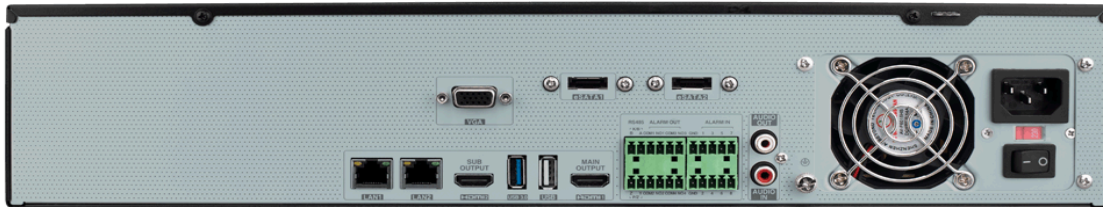

Sinds 2014 gedistribueerd door



VSS Nederland B.V.

Telfordstraat 11M

8013 RL Zwolle

Tel: (038) 4289420

Email: info@vssnederland.nl

Web: www.vssnederland.nl | www.provision-isr.nl

Facebook

LinkedIn

Youtube

