


NSFP-20000SLC

242376

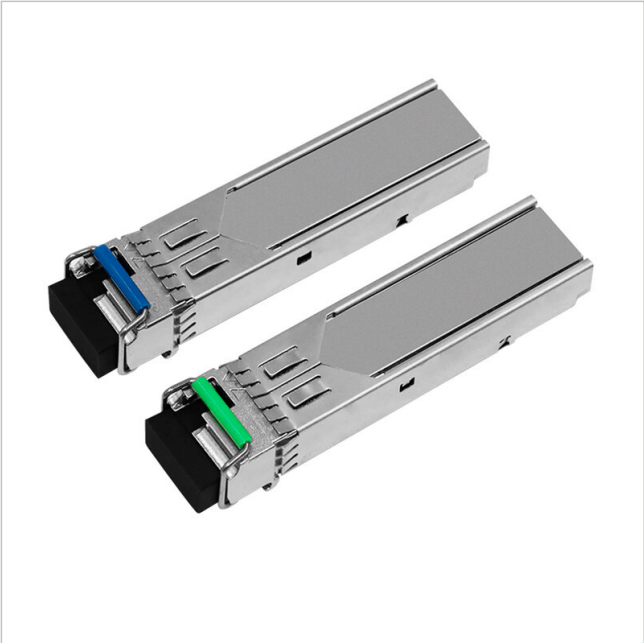

SFP Modul Pair, 1.25 Gbps, 20 km, Simplex LC, Tx/Rx at 1310/1550nm, SFP MSA-compliant, Digital Monitoring

Main Features

1250 Mbps data rate via single-mode fiber	Single +3.3V power supply required
BIDI design for single-fiber use (1310/1550nm)	Metal housing reduces EMI interference
Up to 20 km range on 9/125 µm SMF	Wide temp. range: -40°C to +85°C (industrial)
LC optical connector	TX fault and LOS detection supported
Compliant with SFP MSA & SFF-8472	Low power consumption (max. 300 mA)
Digital Diagnostics (DDM/DOM) integrated	RoHS compliant and lead-free assembly

Specifications

Other	
Number of fibers	1
Design	Module
Mode	Single Mode
Dimensions (WxHxD) (extended)	14,5x12,5x56,3mm
Application environment	inside
Weight	37.47 kg
Multicast	No
Transmission medium	Glass fibre
Type	SFP Module
Fiber Optic Connectors	Duplex LC

NSFP-20000SLC

Continuation of the specifications

Fan	No
Management	No
Manufacturer order number	242376
Rack installation	No
Reach	20 km
Temperature Range (Operating)	-40°C ~ +85°C
VLAN	No

